

Modular LED Luminaire

Industrial LED Modular Floodlight / Bulkhead Luminaire

Specification:

Main Body:

Marine Grade Aluminium

Diffuser:

Polycarbonate

Gaskets:

Silicone

External Fasteners:

A4 Stainless Steel

Stirrup Bracket:

316 Stainless Steel

Weight:

6.0kg per module



Key Features:

- Modular construction allows the modules to be supplied interlinked with each other to provide greater light output.
- Can be used as a single unit – small floodlight or bulkhead or linked together to replicate a large 250W/400W floodlight.
- Each module utilises 48 off 1.2W LED's
- Integrated power supply.
- Low power consumption.
- Rugged construction – resistant to vibration.
- Independently photometrically tested.
- All units supplied with 2 cable entries. Additional entries available on request.
- IP66 and IP67.
- Optional wired guard available for extra protection.
- Infra red variants available (for use with security cameras).
- Narrow, Medium, Wide and Extra Wide beam light output available.
- Multiple mounting options available.
- Emergency variant available - see data sheet HDN106E.

In comparison to typical floodlights:

- 60% less weight.
- 50% less power consumption.
- One man installation.
- LED technology will give a predicted lamp life of 10 years+.
- No light pollution.
- Instant start and restrike.
- No light degradation at low temperatures.
- Penetrating white light.
- Photocell option available.
- Low cost of installation, operation and maintenance.

Engineering Solutions
Design to Manufacture

HADAR 
LIGHTING

Hadar Lighting, Jubilee Industrial Estate, Ashington
Northumberland, NE63 8UG United Kingdom

T: +44 (0) 1670 814 877
F: +44 (0) 1670 858 638

enquiries@hadar-lighting.co.uk

www.hadar-lighting.co.uk

Protection:

IP66/67

Electrical Specifications:

Electrical Specification				
Lamp Options	Power consumption	Power factor	Available power supplies	Ambient
24 x 1.2W LED's	30W Max	0.95	100V – 254V 47/63Hz AC only or 24V AC/DC	-20°C to +50°C
48 x 1.2W LED's	60W Max			
96 x 1.2W LED's	120W Max			
144 x 1.2W LED's	180W Max			

Installation:

Terminals: Up to 4mm² terminals for live, neutral, earth and looping are provided. Internal and external earth as standard.

Cable Entries: 2 x M20, one fitted with approved stopper plug, other entries available on request.


Suspension: Via stirrup bracket, other mounting accessories available. Stainless steel eyebolt for safety chain included as standard.

Installation: Installation document AL10624 supplied.

Ordering Matrix:

Field	Options
Product	HDN106S
Version (LEDs)	0 – 24 LEDs 1 – 48 LEDs 2 – 96 LEDs 3 – 144 LEDs
Voltage	H – 100 - 254V AC only L – 24V AC/DC
Beam Pattern	N – Narrow M – Medium W – Wide X – Extra wide
Mount	H – Horizontal mount (single module version only) V – Vertical mount C – Ceiling mount
Light	W – White light R – Infra red light Y – Yellow light Other colours available on request
Cable Entries	0 – M20 5 – M25
Other Options	04 – Colour RAL 7035 (Grey) 09 – Colour RAL 7035 (Grey) c/w Photocell

Dimensions:

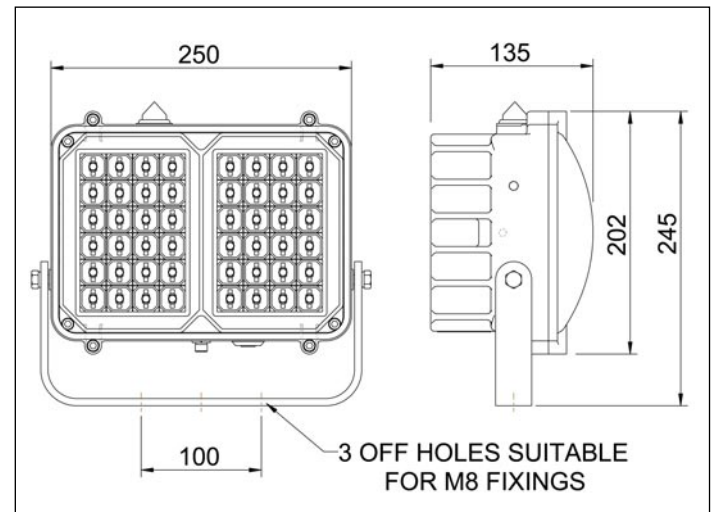

Weight:

24 and 48 LED Luminaire: 6kg

96 LED Luminaire: 12kg

144 LED Luminaire: 18kg

Notes:

1) Typical ordering reference HDN106S1HMHW004.

2) Photometric Data available from the website or contact sales office.



Horizontal mount



Vertical mount